

CARGE AU 2023







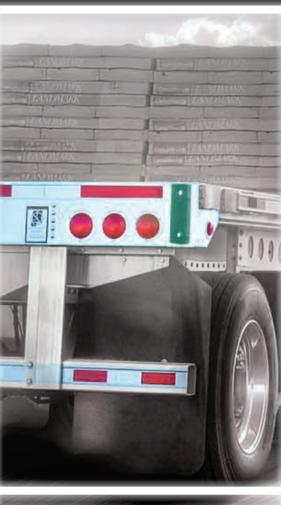

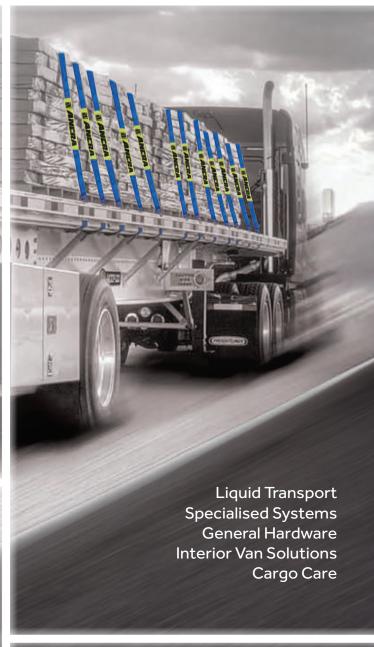

CONTENTS



LIQUID TRANSPORT		VAN SOLUTIONS - HARDWARE	
FlexiTanks (E-Flex, L-Flex, R-Flex)	04	Rope Tie Offs	18
Flexible IBCs (K-Flex, Bitumen Bag, Big Bag)	05	Track Straps	18
		Hardware - Various	18
ANCRA SPECIALISED SYSTEMS			
Lift-A-Deck 2	06	VAN SOLUTIONS - INTERIOR	
Retract-A-Roll 4	07	Body Builders Track	19
Auto Deck	08	Winch Slide Track	20
		Bars & Beams	21
LOAD RESTRAINT		Fittings	21
Straps c/w Hook & Keeper	09		
Web Dog Loadbinders	09	CONTAINER PARTS	
Container Ratchet Tiedown	09	Plywood Flooring	22
Replacement Straps	10	Security Seals	22
Custom Made Straps	10	Twistlocks	22
Strap Assemblies	11	Flatbed Truck Parts	22
Curtain Side Buckles & Straps	11		
Cargo Nets	11	CAR CARRYING	
Rope	11	Tail Assemblies	23
Chain Kits (Transport)	12	Axle Straps	23
Chain (Grade 70)	12	Accessories	23
Hooks	12	Wheel Harness	24
Chain Loadbinders c/w Winged Grabhooks	12	Bottle Jacks	24
Pallet Angles	13	Specialty Aircraft Products	24
Shipping Corner Casts	13		
Hammerlocks	13	CARGO CARE	
Winch Bars	13	Thermal Products	25
Winches - No strap	14		
Winches - With strap	14	TERMS & CONDITIONS	
Web Hooks & Keepers	15	Ancra Terms & Conditions	26
Bottom Strap Assemblies	16		
Flat & Snap Hooks	16		
Ratchet Buckle Range	16		
Cam Buckle Range	17		
Overcentre Buckle Range	17		
Track Fittings	17		
Ring Fittings	17		

LIQUID TRANSPORT FLEXITANKS



LIQUID TRANSPORT SOLUTIONS

Liqu ✓ E-FLEX

E-FLEX - A tank designed to outshine its competition in the shipping process. With a higher capacity, ability to use almost any container, faster fitting process and guaranteed no bulging feature, E-Flex is the way to go if you're looking for the most cost-effective way to transport high volumes of liquid safely and efficiently.

PART NO.	VOLUME	SUITABLE CARGO	FILLING / DISCHARGE	REPEAT USE	USAGE / PREPARATION / STORAGE	
E-FLEX	12,000 to 27,000 Litres Almost Any Non-Hazardous liquid Valve: bottom load. Patented No-Bulkhead design. Standard valve: 3" male camlock 2" adaptor: On request.		Patented No-Bulkhead design. Standard valve: 3" male camlock.	NO	Ideal for juices, oils, and wines as well as chemicals.	
PART NO.	VOLUME	SUITABLE CARGO	FILLING / DISCHARGE	REPEAT USE	USAGE / PREPARATION / STORAGE	
E-FLEX WINE	26,000 Litres	WINE	Valve: bottom load. Patented No-Bulkhead design. Standard valve: 3" male camlock. 2" adaptor: On request.	NO	Ideal for all wine. Export 26,000 Litres Save 8% PLUS on Logistics	
PART NO.	VOLUME	SUITABLE CARGO	FILLING / DISCHARGE	REPEAT USE	USAGE / PREPARATION / STORAGE	
DUAL E-FLEX	Total: 23,000 Litres 10,000 Litres AND 13,000 Litres	Almost Any Non- Hazardous liquid. • Carry 2 products in a single container	Valve: bottom load. Patented No-Bulkhead design. Standard valve: 3" male camlock. 2" adaptor: On request.	NO	Ideal for juices, oils, and wines as well as chemicals.	

ADVANTAGES:

E-Flex tanks are the highest capacity flexitank on the market. The 27,000 capacity allows for about 12% savings on overall freight costs thanks to the increased payload size. You can load base oils, palm oils, stearin, olein, soybean oil, olive oil, canola oil, vegetable oil, sunflower oil fish oil, used cooking oil and biodiesel making use of our high capacity flexitank. A common problem with flexitanks is that they put pressure on the sidewalls of containers, causing bulging. E-Flex supports the entire burden of the cargo by itself, so any container can be used to transport the E-Flex flexitank.



Liqu L-FLEX

L-FLEX - A flexitank specifically designed for 40ft containers. After years of research, we have managed to provide a safe solution for transporting bulk liquids in 40ft containers.

PART NO.	VOLUME	SUITABLE CARGO	FILLING / DISCHARGE	REPEAT USE	USAGE / PREPARATION / STORAGE
L-FLEX	Up to: 26,000 Litres	Almost Any Non- Hazardous liquid.	Valve: bottom load. Patented No-Bulkhead design. Standard valve: 3" male camlock. 2" adaptor: On request.	NO	Ideal for juices, oils, and wines as well as chemicals.

Liqu ∧ R-FLEX (20 FT)

R-FLEX - Transportation in reefer containers is not a straightforward process.

Reefer units tend to be fragile and need to be treated accordingly.

The R-Flex is built to accommodate that.

It's designed to provide a safe way to transport liquids such as juices and dairy in reefer containers.



L-FLEX

PART NO.	VOLUME	SUITABLE CARGO	FILLING / DISCHARGE	REPEAT USE	USAGE / PREPARATION / STORAGE
R-FLEX	12,000 to 22,000 Litres	Milk, Juice, etc, and other temperature sensitive products.	Valve: bottom load. Patented No-Bulkhead design. Standard valve: 3" male camlock. 2" adaptor: On request.	NO	Ideal for food products such as dairy and juice products as well as non DG chemicals that require chilling during transport.

ADVANTAGES:

The R-Flex allows you to avoid transportation costs associated with high-cost packaging materials such as bins and drums. With the R-Flex, the loading and discharge operations

are much faster and require less labor. The R-Flex is also guaranteed not to damage the reefer container or bulge the sidewalls.

The residue left in the flexitank depends on the cargo and how the discharge operation is carried out. In the best case scenario, the residue left over can be as low as 20 litres/5 gallons for certain products such as lemon juice.

Our flexitanks are produced in a clean room environment. On top of that we also offer sterilisation using gamma radiation.





R-FLEX

AUSTRALIA & NEW ZEALAND CARGO CATALOGUE 2023

4

LIQUID TRANSPORT FLEXITANKS



LIQUID TRANSPORT SOLUTIONS

Liqu ∕ K-FLEX - Collapsible Drum IBC

K-FLEX - a low cost alternative for IBCs. It is easy to store as it is collapsed when empty. K-Flex is a good solution both for shipping and storage at about half the price of an IBC.

PART NO.	VOLUME	SUITABLE CARGO	FILLING / DISCHARGE	REPEAT USE	USAGE / PREPARATION / STORAGE
K-FLEX	220 to 2000 Litres PLUS Custom Sizes	Almost Any Non- Hazardous Products	Top Fill via 2" flange, Bottom Discharge via 2" flange and spike valve	YES - The outer fabric is reusable. We provide you with replacement liners to change each Load	Use almost any type of non-hazardous liquid No need to use pallets Oloaded K-Flex units fit into a 20ft (stacked 2 high) or 40ft (no stacking) container. Truck capacity: 20 loaded units (no stacking).

K-FLEX

- The outer fabric is made of polypropylene and the inner liner is made of polyethylene.
- We provide different models of K-Flex which are suitable for 20ft and 40ft containers, as well as for direct transport with trucks.
- K-Flex is built to be stable for safe and easy transport. Some models of the K-Flex are even stackable.
- You can transport almost any type of non-hazardous liquid.
- There is no need to use pallets with the K-Flex. It is designed to be able to stand on its own. However you can use it if you want to.





Liqu BITUMEN BAG

BITUMEN BAG - Bitumen is a crucial resource for many manufacturing purposes. Transporting bitumen isn't easy. Our specialised bitumen bags are designed to carry bitumen safely and allow for easy loading and easy melting.process.

PART NO.	VOLUME	SUITABLE CARGO
BITUMEN BAG	1100 LT model and a 1300 LT model. Custom Sizes available	Bitumen





Liqu ∕ BIG BAG

PART NO.	VOLUME	SUITABLE CARGO	FILLING / DISCHARGE
BIG BAG	Designed for use with 20ft and 40ft shipping containers	Bulky, granular, or powdered products	Designed to your specification

BIG BAG

Our bags are designed to be more durable and stable than our competition. With our bags, it's possible to load more volume in containers by stacking multiple bags on top of one another. Can be used for solutions that require modified atmosphere packaging. Example: nuts, grains, coffee.







AUSTRALIA & NEW ZEALAND CARGO CATALOGUE 2023

5

SPECIALISED SOLUTIONS LAD-2



LAD-2 LIFT-A-DECK

The Lift-A-Deck 2 (LAD-2) system aims to improve operator safety and productivity. It was developed and manufactured in the United States to find the solution to today's transport challenges. It features a high-strength design that is easy to configure and delivers exceptional performance, creating multiple decking platforms for palletised freight. The system starts with a solid foundation of narrow, low-profile, aluminium aircraft-style cargo track. The track's sloping shoulders reduce the chance of forklift damage and attach to the trailer's vertical structural posts every 16 or 24 inches, becoming an integral part of the sidewall structure.

Beginning with your truck interior, we customise unique track configurations to suit your needs. Beams are easily moved by one operator and pushed to the roof for secure storage when not in use. The tracking system fits most trailers and the beams are so versitile that they adjust in one-inch increments.

There are a wide range of accessories to suit your needs such as beam stops, release bars, stud tie-offs, brackets and more safety items to assure you are in safe hands.



PART NO.	DESCRIPTION	RANGE	WORKING LOAD LIMIT
49414-25	STANDARD LAD-2 BEAM WITH STANDARD FOOT AND CHANNEL. (WLL: 999KG-CONSULT 2ND DECK)	ADJUSTMENT RANGE: 237.49cm to 263.53cm	WLL: 1/3 OF BREAKING STRENGTH CAPACITY AND BASED ON EVENLY DISTRIBUTED LOADS
PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
49384-12	BEAM STOP	49445-12	BEAM RELEASE BAR



LAD-2 BEAMS

Lift-A-Deck Video available at: https://www.youtube.com/watch?v=DobgIDOFGVk

PART NO.	DESCRIPTION		1851		
50059-24-72.00	LAD-2 TRACK OPTION - LOW PROFILE SINGLE ROW - FLANGED S-TRACK - 72 INCH (182CM)	•		72"	3
	PROFILE			Pitch 10"	()
	4.0"	Φ	(a)		3

	THE PART OF A		_
PART NO.	DESCRIPTION		
50073-15-72.00	LAD-2 TRACK OPTION - LOW PROFILE DOUBLE ROW - FLANGED S-TRACK - 72 INCH (182CM)	Pitch ()	
	PROFILE		

- Beams have a decking working Load Limit of 999kg
- Beams easily moved by just one operator
- Beams can be positioned in 1" increments for utilisation of space
- Internal locking mechanism helps protect against forklift damage
- Widest Choice of track types to meet every application
- NO track lubrication is required

- Offset foot beams allow for beam storage at ceiling height
- Beam access slot is provided as standard for all tracks for easy beam removal and replacement
- Standard track length is 72"(182cm) being 16" (40cm) loadable
- CUSTOM lengths and an installation manual available upon request

SPECIALISED SOLUTIONS RAR-4



RAR-4 RETRACT-A-ROLL 4

FREIGHT GLIDES ON AND GLIDES OFF. **RAR 4 - IS A PNEUMATIC ROLLER TRACK SYSTEM**

EASIEST CARGO LOADING IN YOUR TRAILER

Ancra's next generation pnuematic roller floor system uses retractable rollers to lift and slide containers to speed turnarounds. Loading and unloading is quicker, reducing handling time and lowering labor costs. Available for air freight or palletised freight, the system instantly converts back to a flat floor for general freight.

LIGHT WEIGHT, HEAVY DURABILITY

Steel top plate and rollers fend off forklifts. Lower sections are aluminum to reduce weight. All parts are easily accessed for inspection or repair. System is powered by pneumatics off the truck's existing air supply. Sealed bearings in skate wheels have lower rolling resistance and longer lifespan.

EASY TO OPERATE

Low pressure pneumatic system runs off your truck's air supply. No other air supply is needed.

EASIEST TO MAINTAIN

Hi-strength, 11-gauge stamped, interlocking steel top plates are easy to remove for maintenance. only being held in place with two screws.

QUICKER

Faster air bag deflation

FAST OPERATION

Large 3/8" Air Lines Allow for the Quickest Inflation/ Deflation on the Market


EFFORTLESS

Improved roll resistance of the Dual Skate Wheels

DUAL SKATE WHEEL

Roller opening Smaller opening in the top plate keeping debris from falling through



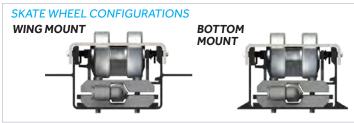

PART NO.	CONVEYOR WIDTH	CONVEYOR HEIGHT	CONVEYOR WEIGHT	INFLATED HEIGHT	ROLLERS	AXLE SPACING	CONVEYOR LENGTHS	LIFTING CAPACITY	BEARING CAPACITY	AIR PRESSURE	CONTROL BOX
65022-22	107mm	70mm	10.7 kg/m	84mm	Dual sealed skate wheels	4", 6" or combination pitch	2.4m, 3m and 4m standard	671 kg/m	136 kg per Skate Wheel Rollers	30psi (2 bar)	Weatherproof Centralised controls
NOTE: RAR-4 CONVEYOR 6" PITCH 156" LG. BOTTOM MOUNT 396cm LG											

PART NO.	DESCRIPTION	INCLUSIONS	
62023-49	AIR TANKS KIT	INCLUDES: TWO AIR TANKS (PN: 60169-10) , AIRLINES AND COUPLINGS	
62011-13P	CONTROL BOX ASSEMBLY (FOR RAR-2): Weatherproof with Centralised Controls		





62023-49



62011-13P



SPECIALISED SOLUTIONS AUTODECK



Aut Deck AUTOMATIC TRAILER DECKING SYSTEM

Ancra Cargo introduced AutoDeck, an automated integrated decking system, which allows loading dock staff and drivers to automate the height of each beam at the push of a button for customised decking solutions.

Decking at the push of a button

Advanced system that improves freight loading efficiency, reduces damage freight claims and maintenance costs, and improves driver and forklift operator's safety & satisfaction.

FASTER

- Beams are adjusted remotely. Forklift operator stays on forklift
- Load a truck 20% faster than with manual systems
- Efficient loading time improves customer service
- Reduced load cost per shipment

RFI IABI F


- System will cycle up to 50 times on one battery charge
- AutoDeck will operate manually in the absence of power
- Rugged design means similar maintenance costs as manual systems

SAFER

- No need to climb over freight to move beams
- Eliminate damaged freight caused by adjusting beams
- Beams disconnect from drive mechanism when contacting freight or persons to prevent damage or injury

FASIFR

- Beams move into place at the push of a button
- Improved system utilisation increases revenue
- Trailer up time increased though proper system use

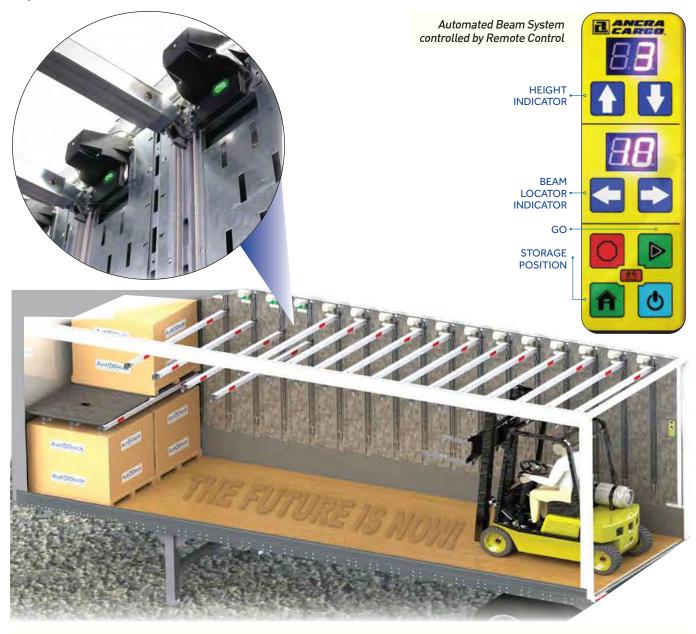

SEE THE VIDEO: www.ancracargo.com/product-category/engineered-products/decking-systems/autodeck/

LOAD RESTRAINT STRAPS



COMPLIES WITH AS/NZS 4380-2001& AS/NZS 4344-2001

PERFECT FOR SECURING GENERAL FREIGHT OF ALL TYPES.

Ancra Ratchet Buckle Loadbinders are made from the highest qualiy steel and passivated to resist abrasion and rust. Standard straps are fitted with wearsleeves and complete with quality fittings. The ratchet standard action adjusts the strap tension for a secure load when in transit. Select from our quality Ancra Range and/or our Premium Secure-A-Load Range.

STRAPS C/W HOOK & KEEPER

PART NO.	TYPE	WEBBING	STRAP	FITTINGS	W/SLEEVES	LC (KG)
44557-7-5MTR	LOADBINDER	25mm	5m	Hook & Keeper each end	2 x W/sleeves	750 kg
50041-7-6MTR	LOADBINDER	35mm	6m	Hook & Keeper each end	2 x W/sleeves	1500 kg
50041-7-6MTR S HK	LOADBINDER	35mm	6m	S Hooks each end	2 x W/sleeves	750 kg
50000-12-3T	LOADBINDER	50mm	9m	Hook & Keeper each end	2 x W/sleeves	3000 kg
50000-12	LOADBINDER	50mm	9m	Hook & Keeper each end	2 x W/sleeves	2500 kg
50000-12-11MTR	LOADBINDER	50mm	11m	Hook & Keeper each end	2 x W/sleeves	2500 kg
50000-12-12MTR	LOADBINDER	50mm	12m	Hook & Keeper each end	2 x W/sleeves	2500 kg
75000-12-EDGE	LOADBINDER	75mm	9m	Hook & Keeper each end	2 x W/sleeves	5000 kg

ANCRA RANGE The Ancra Range has aluminium handles, quality strapping, heavy duty fixtures. Complete with wearsleeves.

NB: 50000-12 Replacement Strap Part No: 50000-12MAIN

75000-12-EDGE







SECURE LUAD STRAPS C/W HOOK & KEEPER

PART NO.	TYPE	WEBBING	STRAP	FITTINGS	W/SLEEVES	LC (KG)
RT-TIEDRATEND	TIE-DOWN TAIL END	50mm	0.5m	Hook & Keeper x 1	N/A	2500 kg
RT-TIED2.5T9M	LOADBINDER	50mm	9m	Hook & Keeper x 2	2 x W/sleeves	2500 kg
RT-TIED2.5T11M	LOADBINDER	50mm	11m	Hook & Keeper x 2	2 x W/sleeves	2500 kg
RT-TIED2.5T13M	LOADBINDER	50mm	13m	Hook & Keeper x 2	2 x W/sleeves	2500 kg
RT-TIED2.5T9ML	REVERSE T/DOWN - LONG HANDLE	50mm	9m	Hook & Keeper x 2	2 x W/sleeves	2500 kg
RT-TIED2.5T9MD	REVERSE T/DOWN - STD HANDLE	50mm	9m	Hook & Keeper x 2	2 x W/sleeves	2500 kg
RT-TIED2.5T11ML	REVERSE T/DOWN - LONG HANDLE	50mm	11m	Hook & Keeper x 2	2 x W/sleeves	2500 kg
RT-TIED2.5T11MD	REVERSE T/DOWN - STD HANDLE	50mm	11m	Hook & Keeper x 2	2 x W/sleeves	2500 kg

SECURE-A-LOAD RANGE Our Premium SAL Range has rubber appointed handles for comfort, quality strapping with extra stitching, heavy duty

fixtures. Complete with

wearsleeves.





PART NO.	TYPE	FITTINGS	W/SLEEVES	LC (KG)
50000-WD	WEB DOG-SUITS 8MM GRADE 70 CHAIN	Grab Hooks each end	NONE	3800 kg



SECURE LOAD CONTAINER RATCHET TIEDOWN

PART NO.	TYPE	WEBBING	STRAP	FITTINGS	W/SLEEVES	LC (KG)
RT-TTD/C3	CONTAINER RATCHET TIEDOWN	50mm	9m	C/W DOUBLE J HOOKS	2 x W/Sleeves	2000 kg
RT-TD05-J-0.7M	BOAT & TARPAULIN TIEDOWN	25mm	700mm	J HOOK EACH END	-	200 kg

RT-TTD/C3

* Available in Blue, Yellow, Green, Orange, White, or can be name personalised to customers requirements

* Custom made tiedowns with various end fittings available.

Main strap or ratchet available separately. *(Minimum quantities apply) Ancra: Aluminium Handles Secure-A-Load: Aluminium c/w Rubber Handles





LOAD RESTRAINT STRAPS



COMPLIES WITH AS/NZS 4380-2001& AS/NZS 4344-2001

PERFECT FOR SECURING GENERAL FREIGHT OF ALL TYPES.

Ancra Ratchet Buckle Loadbinders are made from the highest qualiy steel and passivated to resist abrasion and rust. Standard straps are fitted with wearsleeves and complete with quality fittings. The ratchet standard action adjusts the strap tension for a secure loadwhen in transit. Select from our quality Ancra Range and/or our Premium Secure-A-Load Range.

REPLACEMENT STRAPS

PART NO.	TYPE	WEBBING	STRAP	HOOK & KEEPER	W/SLEEVES	TYPE	LC (KG)
41659-10A	REPLACEMENT WINCH	50mm	9 m	H & K - 1 end	2 x W/sleeves	Winch	2500 kg
41659-10A-13MTR	REPLACEMENT WINCH	50mm	13m	H & K - 1 end	2 x W/sleeves	Winch	2500 kg
41659-10A-3T	REPLACEMENT WINCH	50mm	9m	H & K - 1 end	2 x W/sleeves	Winch	3000 kg
41659-16	REPLACEMENT WINCH	50mm	11m	H & K - 1 end	2 x W/sleeves	Winch	2500 kg
41659-10-12.0MTR	REPLACEMENT WINCH	50mm	12m	H & K - 1 end	2 x W/sleeves	Winch	2500 kg
50000-12MAIN	RATCHET BUCKLE TIEDOWN Suits Hand Ratchets & Loadbinders	50mm	9m	H & K - 1 end For 50000-12 Cut end - No Turnback	-	Tie- down	2500 kg
41545-11-5T	REPLACEMENT	75mm	9m	H & K - 1 end	2 x W/sleeves	Winch	5000 kg
41545-11-5T-11MTR	REPLACEMENT	75mm	11m	H & K - 1 end	2 x W/sleeves	Winch	5000 kg
41546-10	REPLACEMENT	100mm	9m	H&K 1 end	2 x W/sleeves	Winch	5000 kg



CUSTOM MADE STRAPS

We design and manufacture load restraint equipment specifically for your company.

LASHING CAPACITY - Ancra's products are independently tested and rated to meet the Australian and New Zealand standard AS/NZS 4380.2001. Ratings can range from 30-5,000kg

WEB SIZES/ LENGTHS - Ancra produce webbing straps in: 25mm, 35mm, 44mm, 50mm, 75mm right through to 100mm and they can be customised to suit your requirements. Ranging from a 300mm strap, through to 9M and 11M straps on flatbed trailers, to the fully customized strap reaching 100mm x 40m and above.

AVAILABLE TO ORDER ONLINE AT: www.ancdist.com.au

COLOURS - Ancra is able to customize webbing straps for clients throughout Australia by offering a diverse range of colours. Choose from white, red, blue, green, yellow, black, orange and army green - to name just a few. We are also able to match corporate colours with webbing colours.

FITTINGS - Ancra supply an assorted range of hardware fittings that enhance and personalise webbing straps to meet the exact load restraint requirements of our clients. We have designed many new and unique fittings through our close relationships with our suppliers and clients.






We design and manufacture load restraint equipment specifically for your company. Simply choose from this simple 6 step process to build your own strap. Minimum quantities apply.

- 1. What is the required rating for the strap?
- 2. What length and width do you require the strap?
- 3. What colour strap would you like?
- 4. Type of fitting required to secure the load?
- 5. Do you require protective sleeves on the strap?
- 6. Would you like stencilling on your strap?

TANKER ANATOMY OF A RATCHET STRAP

Length: The distance between extreme end bearing points of the web tiedown assembly, including the fittings. Standard fixed end length is 18" (3" for chain anchor straps). This puts the ratchet in

an optimum position on the side of your trailer for driver tensioning. Handholds are typically 6" in length and can be sewn to prevent the webbing from sliding back through the buckle or winch.

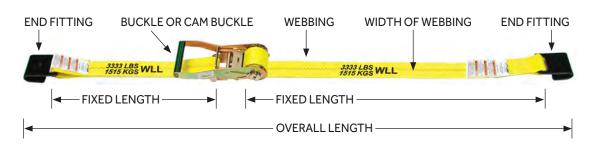



LOAD RESTRAINT CAR CARRYING



COMPLIES WITH AS/NZS 4380-2001& AS/NZS 4344-2001

PERFECT FOR SECURING GENERAL FREIGHT OF ALL TYPES.

Ancra straps are of the highest quality for securing general freight of all types. All of our Ratchet Tiedown straps are designed, manufactured and tested for compliance with AS/NZS 4380:2001.

STRAP ASSEMBLIES

PART NO.	TYPE	WEBBING	STRAP	FITTINGS	LC (KG)
ANC004	REPLACEMENT	50mm Blue	3m	1 x J-Hook (10004-HD) c/w Protective Sleeve around Hook	2500 kg
ANC005	COMPLETE WHEEL HARNESS	50mm	3m	3 x PTS009 1 x 44587-10 Ratchet Buckle Sewn Red Ancra Wearsleeves to end piece	1000 kg



CURTAIN SIDE BUCKLES & STRAPS

PART NO.	ITEM	WEBBING	STRAP	LC (KG)
RT-TLS1	Strap with Vinyl Coated Tie Rail Hook	44mm Black	800mm	650 kg
RT-TLS2	Strap with Rave Hook	44mm Black	800mm	650 kg
S-026	Quick Release Buckle	Suits 44mm		400 kg



CARGO NETS Heavy Duty CARGO NETS for utes. Available in 2 Sizes.

PART NO.	SIZE	DETAILS
ANC-NET-M	Size: 1.8m x 2.2m	Tie off ropes on each corner All 4 sides have reinforced eyelets
ANC-NET-L	Size: 2.2m x 2.5m	Heavy Duty reinforced polyethylene netting 30mm x 30mm mesh size



LANCRA ROPE

ANCRA SILVER ROPE - 8-12MM for all purposes. Polyethylene Silver Rope, 3 strand, Z Twist and 2.0% UV Treated. NB: Silver Rope is a Tarp rope. Should NOT be used solely as a restraint.

PART NO.	DESCRIPTION	ROPE LENGTH
2-18527-125M	Silver Rope 10mm	125m
2-18534-125M	Silver Rope 12mm	125m
2-18527-10MTRS	Silver Rope 10mm	10m
2-18534-10MTR	Silver Rope 12mm	10m



2-18527-125M



2-18534-10MTR

LOAD RESTRAINT TRANSPORT CHAIN



COMPLIES WITH AS/NZS 4380-2001& AS/NZS 4344-2001

GRADE 70 TRANSPORT CHAIN:

is the chain of choice for load binding applications. It is well suited for tiedowns/lashings and logging applications. Every batch is independently tested and test certificates are available upon request. Grade 70 transport chain is electroplated gold to resist oxidization and is sold either by the metre or drum lot. Grade 70 Chain must NEVER be used for LIFTING.

GRADE 70 TRANSPORT CHAIN KITS

PART NO.	DESCRIPTION	CHAIN	FITTINGS	LC (KG)
40552-6MM-9M-GH	6.0mm CHAIN KIT BUCKET	Grade 70 - 9m x 6mm Chain	Winged Grab Hooks each end	2300 kg
40552-8MM-9M-GH	8.0mm CHAIN KIT BUCKET	Grade 70 - 9m x 8mm Chain	Winged Grab Hooks each end	3800 kg
40552-10MM-9M-GH	10.0mm CHAIN KIT BUCKET	Grade 70 - 9m x 10mm Chain	Winged Grab Hooks each end	6000 kg



40552-8MM-9M-GH

CHAIN GRADE 70

PART NO.	CHAIN	CHAIN THICKNESS	LC (KG)
CHAIN 6.0MM	Grade 70 - 6mm Gold Chain	6mm	2300 kg
CHAIN 8.0MM	Grade 70 - 8mm Gold Chain	8mm	3800 kg
CHAIN 10.0MM	Grade 70 - 10mm Gold Chain	10mm	6000 kg
CHAIN 13.0MM	Grade 70 - 13mm Gold Chain	13mm	9000 kg





Ancra houses numerous hook designs/ configurations to suit many different applications. Ancra staff can advise on the most suitable hook types for any given application. Ancra chain and web hooks are manufactured and tested. SLIP HOOKS

PART NO.	TYPE	SIZE	GRADE	LC (KG)
40457	SLIP HOOK - CLEVIS	10mm	70	6000 kg
40456	SLIP HOOK - CLEVIS	8mm	70	3800 kg
RT-HOOKSLIP13	SLIP HOOK - CLEVIS	13mm	70	9000kg



GRAB HOOKS

PART NO.	TYPE	SIZE	GRADE	LC (KG)
40298	GRAB HOOK - Winged	6mm	70	2300 kg
40299	GRAB HOOK - Winged	8mm	70	4000 kg
40300	GRAB HOOK - Winged	10mm	70	6000 kg
40454	GRAB HOOK - Winged	13mm	70	9000 kg



CHAIN LOADBINDERS WITH WINGED GRABHOOKS

PART NO.	TYPE	CHAIN DIAM	FITTINGS	LC (KG)
LB0302-6MM	6mm RATCHET LOADBINDER	6mm	c/w Winged Grab Hooks each end	2300 kg
LB0302	7.3 - 10mm RATCHET LOADBINDER	7.3 - 10mm	c/w Winged Grab Hooks each end	6000 kg
LB14058	13mm RATCHET LOADBINDER	13mm	c/w Winged Grab Hooks each end	9000 kg
40466	6mm LOADBINDER (LEVER TYPE)	6mm	c/w Winged Grab Hooks each end	2300 kg
49796-10	7.3 - 10mm LOADBINDER (LEVER TYPE)	7.3 - 10mm	c/w Winged Grab Hooks each end	6000 kg



CHAIN LOADBINDERS: We supply the standard lever and ratchet type of Chain Loadbinder. These are made to comply with AS/NZ4344 – 2001. Loadbinders are forged and tempered with Winged Grab Hooks which allows for maximum lashing capacity. Winged grab hooks have cradles on both sides of the outer jaws, preventing any deformation to the chain during tensioning.









LOAD RESTRAINT ACCESSORIES



COMPLIES WITH AS/NZS 4380-2001& AS/NZS 4344-2001

PALLET ANGLES

PART NO.	TYPE	LENGTH	MATERIAL
FLCP4000-1040MM	BLUE PALLET ANGLE	1040mm	Polypropelene
FLCP4000-500MM-L	BLUE PALLET ANGLE	500mm	Polypropelene
3478-L	CHAIN SAFETY ANGLE - MOULDED	130mm	Polyurethane





SECURE A LOAD' SHIPPING CORNER CASTS

Manufactured in accordance with ISO~1161. High quality Cast Steel Aldur s45. Shotblasted, primed and machined on six sides.

PART NO.	TYPE	MEASUREMENTS	WEIGHT	MATERIAL
CCBL	CORNER CAST - BOTTOM LEFT	Length: 178mm Width: 162mm Height: 118mm	11.0 kg	Steel Aldur s45 Finish: Shotblasted, Primed, and Machined on 6 Sides
CCBR	CORNER CAST - BOTTOM RIGHT	Length: 178mm Width: 162mm Height: 118mm	11.0 kg	Steel Aldur s45 Finish: Shotblasted, Primed, and Machined on 6 Sides
CCTL	CORNER CAST TOP LEFT	Length: 178mm Width: 162mm Height: 118mm	11.0 kg	Steel Aldur s45 Finish: Shotblasted, Primed, and Machined on 6 Sides
CCTR	CORNER CAST - TOP RIGHT	Length: 178mm Width: 162mm Height: 118mm	11.0 kg	Steel Aldur s45 Finish: Shotblasted, Primed, and Machined on 6 Sides






PART NO.	TYPE	GRADE	WLL
40437	6MM HAMMERLOCK	GRADE 80	1100kg - 3200 kg
40836	8MM HAMMERLOCK	GRADE 80	LIFTING 2000 kg
40837	10MM HAMMERLOCK	GRADE 80	LIFTING 3200 kg
40838	13MM HAMMERLOCK	GRADE 80	LIFTING 5400 kg



TANERA WINCH BARS

PART NO.	FINISH	WEIGHT	LENGTH
42313-10	WINCH BAR with Grip	1.5 kg	550mm
42313-12	COMBINATION WINCH BAR - Boxed End	2.95 kg	1000mm
42313-14	WINCH BAR Bent with Grip	1.5 kg	550mm
42313-17	STANDARD Chrome Winch Bar - Bent with Grip	2 kg	900mm
RT-WINCH- BAR500	SHORT Winch Bar	1.5 kg	500mm

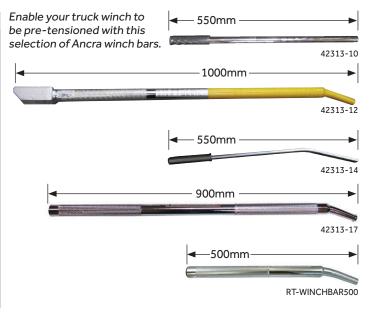

LOAD RESTRAINT WINCHES



49203-10

49203-11

49203-10-RC

COMPLIES WITH AS/NZS 4380-2001& AS/NZS 4344-2001

PERFECT FOR TRAILER & TRANSPORT APPLICATION.

More than 50 years of quality workmanship. All of our winches have a long life-span. Featuring seamless solid-steel mandrels, high strength alloy pins which are passivated to resist abrasion and rust. Our tie down straps offer unsurpassed performance, quality and dependability. They come with Protective Sleeves for further abrasion resistance. All components and assemblies are engineered from high quality materials and the webbing is constructed from advanced performance nylon and polyester. Complies with AS/NZS4380.

TANKER WINCHES SLIDE ON, CLIP, RATCHET CAP, GATE CARRIER

SLIDE ON WINCHES * MADE TO ORDER ITEM. LEAD TIME UP TO 2 WEEKS

PART NO.	TYPE	WIDTH	SPOOL W	FRAME H	FRAME D	BARE MASS	LC (KG)
49203-10	SINGLE BOSS (NON-RATCHET)	320mm	160mm	180mm	101mm	5.66 kg	3000 kg
49203-20	(with 9m STRAP) (NON-RATCHET)	50mm	c/w Hoc	k & Keeper P	LUS 2 x We	arsleeves	2500 kg
49203-20-11MTR*	(with 11m STRAP) (NON-RATCHET)	50mm	c/w Hoo	k & Keeper P	LUS 2 x We	arsleeves	2500 kg
49203-20-12MTRS*	(with 12m STRAP) (NON-RATCHET)	50mm	c/w Hoo	k & Keeper P	LUS 2 x We	arsleeves	2500 kg
49203-11	DOUBLE BOSS (NON-RATCHET)	364mm	169mm	174mm	101mm	5.94 kg	3000 kg
49203-21	(with 9m STRAP) (NON-RATCHET)	50mm	c/w Hoc	k & Keeper P	LUS 2 x We	arsleeves	2500 kg
49203-21-11MTR*	(with 11m STRAP) (NON-RATCHET)	50mm	c/w Hoo	ok & Keeper P	LUS 2 x We	arsleeves	2500 kg
49203-10-RC	RATCHET CAP	335mm	160mm	180mm	102mm	5.96 kg	3000 kg
49203-20-RC	(with 9m STRAP)	50mm	c/w Hoo	arsleeves	2500 kg		
49203-20-11M-RC	(with 11m STRAP)	50mm	c/w Hoc	k & Keeper P	LUS 2 x We	arsleeves	2500 kg
49203-20-12M-RC*	(with 12m STRAP)	50mm	c/w Hoo	k & Keeper P	LUS 2 x We	arsleeves	2500 kg

49203-11-RC	D/BOSS RATCHET CAP	335mm	160mm	180mm	102mm	5.90 kg	3000 kg	
49203-21-RC	(with 9m STRAP)	50mm	c/v	c/w Strap PLUS 2 x Wearsleeves				
49203-13-RC	RATCHET CAP 100MM	305mm	140mm	162mm	101mm	4.66 kg	4000 kg	

49203-11-RC

CLIP ON WINCHES

PART NO.	TYPE	WIDTH	SPOOL W	FRAME H	FRAME D	BARE MASS	LC (KG)
43564-15	SINGLE BOSS (NON-RATCHET)	340mm	172mm	364mm	104mm	6.58 kg	3000 kg
43564-20	(with 9m STRAP) (NON-RATCHET)	50mm	c/w Hook	& Keeper F	LUS 2 x W	earsleeves	2500 kg
43564-20-11MTR*	(with 11m STRAP) (NON-RATCHET)	50mm	c/w Hook	& Keeper F	PLUS 2 x W	earsleeves	2500 kg
43564-20-12MTRS*	(with 12m STRAP) (NON-RATCHET)	50mm	c/w Hook	& Keeper F	PLUS 2 x W	earsleeves	2500 kg

43564-15-RC	RATCHET CAP	320mm	172mm	364mm	104mm	7.14 kg	3000 kg
43564-20-RC	(with 9m STRAP)	50mm	c/w Hook & Keeper PLUS 2 x Wearsleeves				2500 kg
43564-20-RC-11M*	(with 11m STRAP)	50mm	c/w Hook & Keeper PLUS 2 x Wearsleeves				2500 kg
43564-20-RC-12M*	(with 12m STRAP)	50mm	c/w Hook	& Keeper F	LUS 2 x We	earsleeves	2500 kg





GATE CARRIER WINCHES

PART NO.	TYPE	WIDTH	SPOOL W	FRAME H	FRAME D	BARE MASS	LC (KG)	
49203-12-RH	GATE CARRIER (NON-RATCHET)	243mm	81mm	164mm	101mm	3.98 kg	3000 kg	
49203-12-4MTR*	(with 4m STRAP) (NON-RATCHET)	50mm	c/w Hook	c/w Hook & Keeper PLUS 2 x Wearsleeves				
49203-12-5MTR*	(with 5m STRAP) (NON-RATCHET)	50mm	c/w Hook	« & Keeper I	PLUS 2 x W	earsleeves	2500 kg	



49203-12-RH





LOAD RESTRAINT HOOKS & KEEPERS



COMPLIES WITH AS/NZS 4380-2001& AS/NZS 4344-2001

LANGE WEB HOOKS & KEEPERS

PART NO.	TYPE	SIZE	GRADE	LC (KG)
40031-26H	WEB HOOK	25mm	70	750 kg (only when used
40031-26K	WEB KEEPER (Combined with Hook)	25mm	70	as Hook & Keeper
40031-38H	WEB HOOK	35mm	70	1500 kg (only when used
40031-38K	WEB KEEPER (Combined with Hook)	35mm	70	as Hook & Keeper
40031-51	WEB HOOK	50mm	70	2500 kg (only when used
40031-115	WEB KEEPER (Combined with Hook)	50mm	70	as Hook & Keeper
40031-51VINYL	WEB HOOK	50mm	70	2500 kg (only when used
40031-115VINYL	WEB KEEPER (Combined with Hook)	50mm	70	as Hook & Keeper
40031-75H-HD	WEB HOOK	75mm	70	5000 kg (only when used
40031-75K-HD	WEB KEEPER (Combined with Hook)	75mm	70	as Hook & Keeper together)
40024-10	NARROW HOOK - SMALL	25mm	70	600 kg
41313-12	OPEN S HOOK - GOLD PASSIV- ATED	25mm/35mm	70	550 kg
41313-13	OPEN S HOOK - VINYL COATED	25mm/35mm	70	550 kg
43120-15LD	TIE RAIL HOOK - 8mm WIRE	50mm	70	750 kg
43120-15LD-VINYL	TIE RAIL HOOK - VINYL COATED	50mm	70	750 kg
10004-HD-TOLL	HEAVY DUTY SINGLE LEG J HOOK	50mm	70	2500 kg

WWETTOOKS				
45228-10	LARGE OPEN	44mm	STEEL	750 kg
45228-10-1	NARROW CLOSED	44mm	STEEL	750 kg
45228-10VINYL	LARGE OPEN VINYL	44mm	STEEL, VINYL COVER	750 kg
45228-10-1VINYL	NARROW CLOSED VINYL	44mm	STEEL, VINYL COVER	750 kg





40031-26K











40031-51VINYL

40031-115VINYL





40031-75H-HD

40024-10

41313-12









43120-15LD-VINYL

100004-HD-TOLL





45228-10

45228-10-1





LOAD RESTRAINT ASSEMBLIES/BUCKLES



COMPLIES WITH AS/NZS 4380-2001& AS/NZS 4344-2001

BOTTOM STRAP ASSEMBLIES

PART NO.	TYPE	WEBBING	STRAP	FITTINGS	LC (KG)
54003-6	BOTTOM STRAP ASSEMBLY - COMPLETE RAVE	44mm Black	1000mm	1 x Narrow Closed Rave Hook - Gold/Zinc Finish	750 kg
54003-7-VINYL	BOTTOM STRAP ASSEMBLY - COMPLETE TIE RAIL	44mm Black	1000mm	1 x Vinyl Tie Rail Hook - Vinyl Finish	750 kg
54003-7	BOTTOM STRAP ASSEMBLY - COMPLETE TIE RAIL	44mm Black	1000mm	1 x Gold Tie Rail Hook - Gold/Zincl Finish	750 kg
54003-6-VINYL-A	BOTTOM STRAP ASSEMBLY- COMPLETE RAVE	44mm Black	1000mm	1 x Large Open Rave Hook - Vinyl Finish	750 kg



TANGRA FLAT & SNAP HOOKS

LARGO FLAT & SNAP HOOKS						
PART NO.	TYPE	MATERIAL	WEIGHT	LASHING		
FLAT HOOKS						
40044-10	25MM FLAT HOOK C/W KEEPER	GOLD PASSIVATED	25mm	750 kg		
40065-10	25MM FLAT HOOK	GOLD PASSIVATED	25mm	500 kg		
43099-10	50MM FLAT HOOK - STD	GOLD PASSIVATED	50mm	1250 kg		
SNAP HOOKS						
43044-10	25MM SNAP HOOK	GOLD PASSIVATED	25mm	750 kg		
40084-14	50MM SNAP HOOK	GOLD PASSIVATED	50mm	1400 kg		
2450-10	10MM SNAP HOOK	ZINC PLATED	25mm	150 kg		



RATCHET BUCKLE RANGE

PART NO.	ТҮРЕ	MATERIAL	WEIGHT	LASHING
43320-32	25MM RATCHET BUCKLE - GOLD	GOLD PASSIVATED	0.34 kg	750 kg
48770-10	25MM RATCHET BUCKLE - BLACK	POWDER COATED	0.24 kg	300 kg
PC1001SS	25MM RATCHET BUCKLE	STAINLESS STEEL	0.20 kg	400 kg
44257-10	35MM RATCHET BUCKLE	GOLD PASSIVATED	0.58 kg	1500 kg
47700-10	50MM RATCHET BUCKLE - REVERSE	GOLD PASSIVATED	1.16 kg	2500 kg
44587-10BLK	50MM RATCHET BUCKLE - BLACK WIDE HANDLE	GOLD PASSIVATED	1.05 kg	2500 kg
RT-50RATBUCKLE	50MM RATCHET BUCKLE - GRIPSAFE	GOLD PASSIVATED	1.10 kg	2500 kg
44627-11	50MM RATCHET BUCKLE - SHORT HANDLE	GOLD PASSIVATED	0.95 kg	2500 kg





44257-10











48770-10

RT-50RATBUCKLE 44627-11 PC1001SS

LOAD RESTRAINT BUCKLE RANGE



COMPLIES WITH AS/NZS 4380-2001& AS/NZS 4344-2001

CAM & OVERCENTRE BUCKLE RANGE

PART NO.	ТҮРЕ	MATERIAL	WEIGHT	LASHING
41030-12	25MM CAM BUCKLE - SMALL LIGHT DUTY	ZINC PLATED	0.06 kg	100 kg
42195-10	25MM CAM BUCKLE - LIGHT DUTY	ZINC PLATED	0.16 kg	340 kg
40880-21	25MM CAM BUCKLE - HEAVY DUTY	ZINC PLATED	0.10 kg	400 kg
44770-11	35MM CAM BUCKLE - HEAVY DUTY	ZINC PLATED	0.16 kg	350 kg
40880-19	50MM CAM BUCKLE - HEAVY DUTY	ZINC PLATED	0.24 kg	550 kg
S-026	RT-BUCKLE: OVERCENTRE BUCKLE - 50MM NOMINAL SIZE	STAINLESS STEEL	0.24 kg	400 kg
S-843SS	OVERCENTRE BUCKLE - 50MM NOMINAL SIZE	STAINLESS STEEL	0.34 kg	400 kg
47800-10	OVERCENTRE BUCKLE - 50MM NOMINAL SIZE	GOLD PASSIVATED	0.28 kg	1000 kg



AUSTRALIA & NEW ZEALAND















TRACK & RING FITTINGS

PART NO.	ART NO. TYPE		LASHING				
TRACK FITTING	TRACK FITTINGS						
40921-12	F SERIES - BEAM SOCKET	0.05 kg	-				
40921-10	E SERIES - BEAM SOCKET	0.32 kg	-				
40978-11	50MM DELTA RING	0.12 kg	2200 kg				
43977-10	FOOTMANS LOOP	0.1 kg	500 kg				
42012-12	TRACK HOOK - HEAVY DUTY	0.1 kg	400 kg				
40980-11-01	F SERIES - BUTTERFLY CLIPS (PAIRS)	0.06 kg	400 kg				
40980-11A	END CONNECTIONS (PAIRS)	0.05 kg	300 kg				
47608-21	FITTING - SPRING LOADED	0.05 kg	1000 kg				
40980-12	F SERIES - END FITTING	0.05 kg	400 kg				

RINGS FITTINGS					
40025-10	D RING - 25MM	25 mm	1000 kg		
40025-12	D RING - 50MM	50mm	1000 kg		
40031-15K	D RING - 50MM (INTERNAL : 53MM X 53MM)	50mm	1000 kg		
40031-10K	1-10K D RING - 50MM (INTERNAL : 53MM X 67MM)		1000 kg		
10178	0178 ANCHOR PLATE TO SUIT 25MM WEB		500 kg		
511072400AEIA	ANCHOR PLATE TO SUIT 50MM WEB	50mm	2000 kg		





CARGO CATALOGUE 2023

VAN SOLUTIONS HARDWARE



COMPLIES WITH AS/NZS 4380-2001& AS/NZS 4344-2001

ROPE TIE OFFS

PART NO.	TYPE	WEB SIZE	LASHING
40386-10	ROPE TIEOFF - E FITTING TO D RING	50mm	600 kg
40386-12	ROPE TIEOFF - BUTTERFLY TO D RING	50mm	300 kg
40386-13	ROPE TIEOFF - F FITTING TO D RING	50mm	300 kg





SECURE LOAD TRACK STRAPS

PART NO.	TYPE	WEB SIZE	TAIL	MAIN	LASHING
RT-FTRACKSTRAP	4.5M STRAP ASSEMBLY BLUE STRAP WITH F-FITTING	50mm	1.2m	3.3m	300 kg
RT-ETRACKSTRAP	4.5M STRAP ASSEMBLY RED STRAP WITH E-FITTING	50mm	1.2m	3.3m	1000 kg





HARDWARE VARIOUS

PART NO.	TYPE	MATERIAL	PARTS
RUBBER PRODUCTS			
ANC5003	CORNER FILLER TABS		DOOR SEAL
ANC5011	TYPE H HARD BACK SOFT SEAL	EXTRUSION 5m	LENGTH 5m DIAMETER 20mm
SPRING BOLTS			
ANC1509	SPRING BOLT	MILD STEEL / ZINC PLATED	HANDLE WIDTH 65mm PLATE LENGTH 75mm BOLT WIDTH 12.5mm
ANC1516	SPRING BOLT	MILD STEEL / ZINC PLATED	HANDLE WIDTH 105mm PLATE LENGTH 119mm BOLT WIDTH 16mm
ANTILUCE			
ANC1507	WELD ON ANTI LUCE 90mm M12	ZINC PLATED	SIZE: MEDIUM
ANC1508	BOLT ON ANTI LUCE 90mm M12	ZINC PLATED	SIZE: MEDIUM
ANC1511	WELD ON ANTI LUCE 60mm M8	ZINC PLATED	SIZE: SMALL
ANC1512	BOLT ON ANTI LUCE 60mm M8	ZINC PLATED	SIZE: SMALL











HARDWARE VARIOUS

PART NO.	TYPE	MATERIAL	SIZES	SIZING
FLOOR RINGS				
ANC3002	FLOOR RING - RECESSED BREAK LIMIT 2000k	ZINC PLATED	LENGTH 95mm WIDTH 102mm THICKNESS 11mm	RING SIZE 25mm MATERIAL 3mm SCREW SIZE 5mm
ANC3004	FLOOR RING - RECESSED BREAK LIMIT 2000k	ZINC PLATED	LENGTH 100mm WIDTH 120mm THICKNESS 11mm	RING SIZE 25mm MATERIAL 3mm SCREW SIZE 5mm
RT-LASHRING	LASHING RING - RECESSED	ZINC PLATED	LENGTH 124mm WIDTH 115m	WORKING LIMIT 1135 kg
45545-15	LOW PROFILE PAN FITTING 4" POLYETHYLENE COLLAR	ZINC PLATED RING	BREAK LIMIT 727KG	WORKING LIMIT 350 kg









AUSTRALIA & NEW ZEALAND

CARGO CATALOGUE 2023

VAN SOLUTIONS INTERIOR




COMPLIES WITH AS/NZS 4380-2001& AS/NZS 4344-2001

11 CARGO BODY BUILDERS TRACK

PART NO.	DESCRIPTION	WEIGHT	HOLE SIZE	WIDTH	DEPTH	THICKNESS
ANC3542	E-TYPE TRACK - 3 METRE TRACK - ZINC PLATED - E COMBINATION	5.90 kg	25mm	129mm	12mm	2.5mm
ANC3544	E-TYPE TRACK - 5.8 METRE TRACK - ZINC PLATED - E COMBINATION	11.50 kg	25mm	129mm	12mm	2.5mm
ANC3532	F-TYPE TRACK - 3.0 METRE TRACK - ZINC PLATED	4.70 kg	25mm	82mm	12mm	2.5mm
ANC3534	F-TYPE TRACK - 5.8 METRE TRACK - ZINC PLATED	9.40 kg	25mm	82mm	12mm	2.5mm


ANC3542 & ANC3544 PROFILE

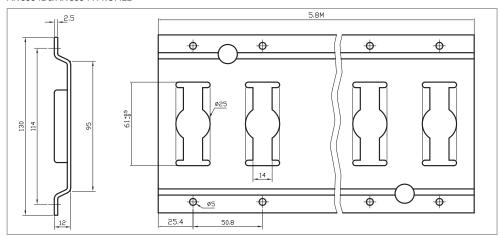

ANC3532 PROFILE



ANC3534

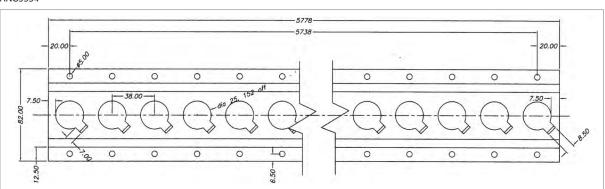


VAN SOLUTIONS INTERIOR



TANGO WINCH SLIDE TRACK

PART NO.	DESCRIPTION	WEIGHT	LENGTH	WIDTH	HEIGHT	THICKNESS
42357-2.4MTR	WINCH SLIDE TRACK - 2.4 METRE TRACK - CORTEN STEEL	14.0 kg	2400mm	115mm	34mm	4mm
42357-3.0MTR	WINCH SLIDE TRACK - 3 METRE TRACK - CORTEN STEEL	15.60 kg	3000mm	115mm	34mm	4mm

42357-2.4MTR & 42357-3.0MTR PROFILE

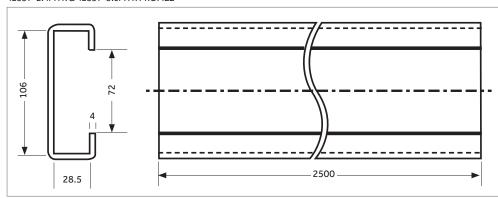



PART NO.	DESCRIPTION	WEIGHT	HOLE SIZE	WIDTH	THICKNESS
40467-33-144	LOGISTICS TRACK - 3.0 METRE TRACK - ZINC PLATED	3.20 kg	11mm	35mm	13.5mm

Superior quality 12' track is constructed from grade 6351 aluminum for the most heavy duty style of L-track available on the market. The extra long length is a versatile choice for all types of tie down applications, and is compatible with all of our L-track fittings including single & double stud fittings.

40467-33-144





VAN SOLUTIONS INTERIOR



COMPLIES WITH AS/NZS 4380-2001& AS/NZS 4344-2001

BARS & BEAMS

PART NO.	TYPE	WEIGHT	THICKNESS	HEIGHT	WIDTH	LENGTH	WLL
43638-51	E SERIES DECKING BEAM	8.42 kg	3mm	82mm	66mm	2340 to 2610mm	1000 kg
49439-11	F SERIES ADJUSTABLE - Shoring Bar	9.12 kg	40mm	2240mm	40mm	2170 to 2570mm END DIM: 25mm	227 kg
49439-11-H	F SERIES ADJUSTABLE - Shoring Bar	9.12 kg	Complete w	ith HANDLE	40mm	2170 to 2570mm END DIM: 25mm	227 kg
50441-10	LARGE CARGO STA BAR	RATCHETIN	RATCHETING ACCESSORY			2225mm to 2565mm	-
RT-JACKBAR	STEEL - CARGO BAR	9.2 kg	100mm	2180mm	150mm	Adjust from: 2175mm to 2900mm	600 kg
SL125	CARGO STAY BAR - RATCHET TYPE	2.0 kg	100mm	1000mm	100mm	Adjust from: 1020mm to 1780mm	-



LANGRA FITTINGS

PART NO.	ТҮРЕ	WLL	WEIGHT	LENGTH	WIDTH	HEIGHT
ANC1021	F SERIES -END CAP - ALUMINIUM	-	0.034 kg	80mm	35mm	12mm
ANC1022	E SERIES -END CAP - ALUMINIUM	-	0.074 kg	130mm	35mm	12mm
ANC1020	END CAP - AIR FLOW FLOORING	-	0.04 kg	225mm	70mm	40mm
50112-20	SINGLE STUD FITTING - CARGO	750 kg	0.076 kg	38mm	30mm	40mm
50362-11	DOUBLE STUD FITTING - CARGO	1350 kg	0.144 kg	65mm	58mm	25mm



CONTAINER PARTS ACCESSORIES




COMPLIES WITH AS/NZS 4380-2001& AS/NZS 4344-2001




SECURE A LOAD' CONTAINER ACCESSORIES

PART NO.	TYPE	WLL
FPLY	PLYWOOD FLOORING: SHIPPING CONTAINER FLOOR LAMINATION AQIS APPROVED	2440 X 1220 X 28 MM - 19 LAMINATIONS
FPLY-REBATE	REBATED PLY FLOORING: WITH NICHE EDGING FOR SNUG FIT FOR CONTAINER FLOOR	1160mm x 2400 x 28mm - with rebate edge of 5mm x 25mm










SECURE A LOAD' SECURITY SEALS

PART NO.	ТҮРЕ	PART NO.	ТҮРЕ
SEALBOLT	HIGH SECURITY BOLTS SEAL (11.7mm DIAMETER)	SEALTRANS	ZIP TYPE PLASTIC SEAL
SEALBOLT3	SECURITY BOLT SEAL 4mm SHAFT	SEALSTEEL	STEEL STRIP SEAL
SEALPLAST	PLASTIC STRIP SEAL		




SECURE A LOAD' TWISTLOCKS & TRUCK FLATBED PARTS

PART NO.	ТҮРЕ	MATERIAL	WEIGHT	WLL
MLT1-2L	MARINE STACKING TWISTLOCK - (Double Stacking) LEFT HAND Locking - Securing Containers when Stacked	HOT DIPPED- GALVANISED	5.8 kg	SWL: 25 TON BL: 50 TON
MLT4-1L	DOVETAIL TWISTLOCK - (Left Hand Locking)	HOT DIPPED- GALVANISED	5.8 kg	SWL: 25 TON BL: 50 TON
MLDF-1A	BASE TO DOVETAIL TWISTLOCK	CAST STEEL	-	SWL: 25 TON
MLBF-1	BRIDGE FITTING - (for Horizontal Container Locking)	GALVANISED	-	SWL: 5 TON




MLDF-1A
















PART NO.	ТҮРЕ
RT-TLOCKHDL	TWISTLOCK - (Standard) - Handle Only
T-TWISTLCK1	TWISTLOCK - (Complete)
RT-TLOCKSH1	TWISTLOCK - (Standard Internals-Guts)

CAR CARRYING ASSEMBLIES & ACCESSORIES



COMPLIES WITH AS/NZS 4380-2001& AS/NZS 4344-2001

TAIL ASSEMBLIES & AXLE STRAPS

PART NO.	TYPE	DETAILS	L/C
TAIL ASSEMBLIES			
50044-3-1-EK	REPLACEMENT STRAP	2.7M WITH J-HOOK	2500 kg
ANC002	J-HOOK - TAIL STRAP 3 WITH 1 X 44587-10 BLK RATCHET BUCKLE 1 X 10004-HD c/w J HOOK	SEWN YELLOW ANCRA WEAR SLEEVE TO END PIECE	2500 kg
ANC007	T HOOK- TAIL STRAP, 1 X PTS009 300MM X 50MM WEBBING	SEWN RED ANCRA WEAR SLEEVES TO END PIECE	1000 kg

AXLE STRAPS

54028-520MM	AXLE STRAP	520MM SEWN EYE	2500 kg
54028-7-BLUE	AXLE STRAP	450MM SEWN EYE	2500 kg
54028-QD	D-RING	460MM	1000 kg
54028-7-YELLOW	AXLE STRAP	630MM SEWN EYE	2500 kg
54028-JLR 630MM	AXLE STRAP - 630MM D RING	(OVERALL LENGTH INCL. RINGS)	1000 kg
54028-TZ-520MM	CAR RESTRAINT STRAP - 50MM ORANGE WEB D RINGS EACH END 520MM	(WEBBING LENGTH WITHOUT RINGS)	2500 kg
RT-TIEDCCDE2	CAR CARRYING JOINER WEB - RED - 480MM LENGTH	JOINER WEB C/W 2 X D-RINGS AT EACH END. SEWN RED STRAP	1500 kg
RT-TIEDCCLE/2	AU ONLY - CAR CARRY LONG END LOOP END	50MM X 3M - POLYESTER WITH YELLOW - LOOP END	2000 kg



TARGO CAR CARRYING ACCESSORIES

PART NO.	ТҮРЕ	WEIGHT	LASHING
PTS009	9MM RETAINER	ROLLER HOOK	1000 kg
3915CSW	CONTAINER RATCHET HOOK	BENT TO FIT BETTER INTO CONTAINERS	1000 kg
3924CSW	CONTAINER DECK HOOK WITH ROLLER	BENT TO FIT BETTER INTO CONTAINERS	1000 kg
10004-HD-TOLL	50MM SINGLE "J" HOOK	HEAVY DUTY	2500 kg
49603-10	TRACKSTAR MOTORCYCLE WHEELCHOCK. QUICK CONNECT TO AIRCRAFT STYLE	L TRACK FITS TYRE WIDTHS FROM 3.5" TO 5.5" c/w MOUNTING KIT. 3.18KG	1000 kg











AUSTRALIA & NEW ZEALAND

10004-HD-TOLL JHOOK

CARGO CATALOGUE 2023

CAR CARRYING ASSEMBLIES & STRAPS



COMPLIES WITH AS/NZS 4380-2001& AS/NZS 4344-2001

TANERA WHEEL HARNESS

PART NO.	TYPE	DETAILS	LASHING
50025-6-01	WHEEL HARNESS ASSEMBLY FULLY ADJUSTABLE WITH CAM BUCKLE	50MM BLUE WEB WITH HOOK & KEEPER 2.4M DIAMETER WITH 2.4M TAIL SUITS TRUCK/TRACTOR	550 kg
50025-6-01-100040	WHEEL HARNESS ASSEMBLY FULLY ADJUSTABLE WITH CAM BUCKLE	50MM BLUE WEB WITH 100040 HOOK 2.4M DIAMETER WITH 2.4M TAIL SUITS TRUCK/TRACTOR	550 kg
	WILLER TIABNIESS ASSEMBLY	FORM BLUE WEB WITH HOOK & KEEPER	
50025-3-HK	WHEEL HARNESS ASSEMBLY FULLY ADJUSTABLE WITH CAM BUCKLE	50MM BLUE WEB WITH HOOK & KEEPER 1.1M DIAMETER WITH 1.1M TAIL SUITS CAR & 4WD	550 kg
50025-3	WHEEL HARNESS ASSEMBLY FULLY ADJUSTABLE WITH CAM BUCKLE	50MM ORANGE WEB WITH 100040 HOOK 0.9M DIAMETER WITH 0.9M TAIL SUITS CAR & 4WD	550 kg
50044-3-3J-NO PAD	WHEEL RESTRAINT - 50MM X 3MTR	C/W 3 X 10004-HD HOOKS - NO PADS 2500 kg	2500 kg
	WILLERESTRAINT SOMMENSIME	C/W 3 X 10004 FID FIGORS - NOTADS 2500 kg	2300 kg
RT-TIEDCCSET1 RT-TIEDCCSET2	(SINGLE HOOK) (DOUBLE HOOK	CAR CARRYING RATCHET TIEDOWNS SIZE: 50MM X 3M AVAILABLE IN SINGLE, DOUBLE HOOKS	2000 kg
54028-QD & 50000-12	WHEEL HARNESS	C/W HOOK AND KEEPER	2500 kg
RD222-RUBBER	RUBBER WEAR SLEEVE	100MM HEAVY DUTY - 250MM LONG	-
RACQ-BRIDLE- 500MM	RACQ BRIDLE 500MM	C/W 6MM EYE SLING HOOKS AND LATCHES	1500 kg
RACQ 10004	50MM TOW BRIDLE	C/W HEAVY DUTY SINGLE J HOOKS - 500MM LONG LEGS	2500 kg

SUITS TRUCK OR TRACTOR









BOTTLE JACKS


PART NO.	TYPE	MIN HEIGHT	DETAILS
ANC012	12 TONNE BOTTLE JACK - WITH HANDLE - 12000 KG SAFE WORKING LOAD	MINIMUM HGT: 191mm ADJUSTABLE HGT: 65mm LIFTING HGT: 105mm	MAX HEIGHT: 361mm NET WEIGHT: 7.6 kg
ANC020	20 TONNE BOTTLE JACK - WITH HANDLE - 20000 KG SAFE WORKING LOAD	MINIMUM HGT: 191mm ADJUSTABLE HGT: 72mm LIFTING HGT: 113mm	MAX HEIGHT: 376mm NET WEIGHT: 11.3 kg



DARGO SPECIALTY AIRCRAFT PRODUCTS

Aircraft Seat Track — Standard aircraft track is used in the securement of cargo and interior assemblies. Made from 7075-T6 aluminum alloy extrusion to meet specification MS 33601 and ISO 7166. Available in heavy and medium duty.

PART NO.	DESCRIPTION	WEIGHT	LENGTH	LOAD
40467-11-144	HEAVY DUTY SEAT TRACK 3.66M FINISH: 10 CLEAR ANODIZED PER MIL-A-8625, TYPE II, CLASS 1 -11 UNANODIZED	.60 LBS/FT	12 FEET	6000 lbs Vertical
40456-11-144	MEDIUM DUTY SEAT TRACK 3.66M FINISH: 10 CLEAR ANODIZED PER MIL-A-8625, TYPE II, CLASS 1 -11 UNANODIZED	.60 LBS/FT	12 FEET	6000 lbs Vertical



CARGO CARE THERMAL PRODUCTS



COMPLIES WITH AS/NZS 4380-2001& AS/NZS 4344-2001

SureTemp I INSULATION SOLUTIONS

PALLET COVERS

SureTemp® Prime - Performance Embossed Metalized Pallet Cover is designed to provide short-term protection of products against low duration exposure of extreme temperatures during the shipping cycle at origin, destination, and at trans-shipment points. The outer layer of the SureTemp® Prime Performance Embossed Metalized Pallet Cover is made of reflective metalized film, which protects against solar radiation. Inside is an advanced non woven PET Core insulation sealed in by a layer of clear polyethylene.

STP-PRIME1.2	PRIME: EMBOSSED / METALISED	1.2m x 1.2m x 1.2m	EMBOSED METALISED FILM NON-WOVEN POLYETHYLENE
STP-PRIME1.5	PRIME: EMBOSSED / METALISED	1.2m x 1.2m x 1.5m	EMBOSED METALISED FILM NON-WOVEN POLYETHYLENE

SureTemp® Premium-Performance Metalized Pallet Covers are mid-performance pallet covers that shippers turn to when looking to minimize temperature excursions and maintain cold chain for Air & LTL shipments. The outer layer of the SureTemp® Premium-Performance Metalized Pallet Cover is made of reflective metalized film, which provides protection against solar radiation. Inside is an advanced single layer bubble insulation between two layers of clear polyethylene, designed to reduce heat transfer through conduction.

STP-PREMS1.2	PREMIUM S: METALISED SINGLE BUBBLE	1.2m x 1.2m x 1.2m	METALISED FILM CLEAR POLYETHYLENE TRAPPED AIR POLYETHYLENE
STP-PREMS1.5	PREMIUM S: METALISED SINGLE BUBBLE	1.2m x 1.2m x 1.5m	METALISED FILM CLEAR POLYETHYLENE TRAPPED AIR POLYETHYLENE

SureTemp® Premium-Performance Metalized Pallet Covers are Premium pallet covers that shippers turn to when looking to minimize temperature excursions and maintain cold chain for Air & LTL shipments. The outer layer of the SureTemp® Premium-Performance Metalized Pallet Cover is made of reflective metalized film, which provides protection against solar radiation. Inside is an advanced dual layer bubble insulation between two layers of clear polyethylene, designed to reduce heat transfer through conduction.

STP-PREMD1.2	PREMIUM D: METALISED DOUBLE BUBBLE	1.2m x 1.2m x 1.2m	METALISED FILM x 2 CLEAR POLYETHYLENE x3 TRAPPED AIR POLYETHYLENE x2
STP-PREMD1.5	PREMIUM D: METALISED DOUBLE BUBBLE	1.2m x 1.2m x 1.5m	METALISED FILM x2 CLEAR POLYETHYLENE x3 TRAPPED AIR POLYETHYLENE x2





CONTAINER LINERS

SureTemp® Premium Performance Metalized Container Wall Liner with trapped air technology is an economical passive temperature protection liner for sidewall protection against heat & cold in your cold chain. It is designed to provide short term protection of products

against low-duration exposure of extreme temperatures.

The outer layer is made of reflective metalized film, which protects against solar radiation. Inside is an advanced single (STP-ROLL-S) or Double (STP-ROLL-D) layer bubble insulation between two layers of clear polyethylene, designed to reduce conductive heat transfer.

STP-ROLL-S	PREMIUM S: METALISED + SINGLE BUBBLE	50m x 1.5m	METALISED FILM CLEAR POLYETHYLENE x2 TRAPPED AIR POLYETHYLENE
STP-ROLL-D	PREMIUM S: METALISED + DOUBLE BUBBLE	50m x 1.5m	METALISED FILM x2 CLEAR POLYETHYLENE x3 TRAPPED AIR POLYETHYLENEx2

SureTemp® Prime Transoceanic Container Liner with pure aluminum and metalized PET is our most reliable passive temperature protection liner designed for full container cold chain protection. This liner is designed to safeguard your cargo from a range of possible damages that can occur during overseas shipping. An effective radiant barrier is attained through the outer layer of pure aluminum, which is the highest protection against both visible light and infrared radiation. Aluminum's lower emissivity value makes this product an efficient and protective buffer against extreme temperatures.

Thermal Protection: Specifically engineered to provide radiant heat transfer protection from extreme heat. Provides excellent protection against temperature excursions in extreme hot ambient temperatures.

protection against temperature executions in extreme not ambient temperatures.			
STP-LINER5-20	PRIME: 5-SIDED LINER	20FT LINER - WITHOUT FLOOR C/W DETACHABLE BARS	PURE ALUMINIUM WOVEN POLYETHYLENE METALISED FILM
STP-LINER5-40	PRIME: 5-SIDED LINER	40FT LINER - WITHOUT FLOOR C/W DETACHABLE BARS	PURE ALUMINIUM WOVEN POLYETHYLENE METALISED FILM
STP-LINER5- 40-HC	PRIME: 5-SIDED LINER HIGH CUBE: 9FT 6" HEIGHT	40FT LINER - WITHOUT FLOOR C/W DETACHABLE BARS	PURE ALUMINIUM WOVEN POLYETHYLENE METALISED FILM
STP-LINER6-20	PRIME: 6-SIDED LINER	20FT LINER - WITH FLOOR C/W DETACHABLE BARS	PURE ALUMINIUM WOVEN POLYETHYLENE METALISED FILM








CONTAINER BLANKETS

SureTemp® Elite-Performance Container Blanket offers the highest level of protection during product exposure to extreme temperatures. Designed for FTL/FCL top load protection against both cold and heat in your cold chain. An effective radiant barrier is attained through the outer layer of metalized film, which protects extremely well against visible light radiation, as well as moderate thermal protection from infrared radiation. Inside is our hollow-fiber insulation – the SureTemp® brand's highest level of insulating material – between woven polyethylene layers. Woven polyethylene's high tensile strength and tear-resistance give the product additional physical protective capabilities and contribute to its durability and reusability.

STP- ELITEBLANKET	ELITE GSM - FIBRE 150 GSM	25FT BLANKET SURROUNDS 3 SIDES	PURE ALUMINIUM WOVEN POLYETHYLENE x2 HOLLOW FIBRE FILL
			METALISED FILM



CARGO CATALOGUE 2023




TERMS & CONDITIONS



TERMS AND CONDITIONS OF SALE

- 1. **Exclusion of other Terms and Conditions:** The following terms and conditions shall apply to the sale of all products by ANC DISTRIBUTION Australia Pty. Ltd. ("the Company") to the exclusion of any and all terms and conditions in any documents submitted to the Company by the Customer whether prior to or following the Customer's receipt of these terms and conditions.
- 2. **Basis of Acceptance of Quotation:** All quotations verbal or written are based on information provided by the Customer (or by third parties on its behalf). Any extra cost or expense arising from incorrect information shall be paid by the Customer.
 - The company will use its best endeavours to meet specified delivery dates and must notify the Customer as soon as it becomes aware that it will be unable to meet a previously advised delivery date but the Company will be under no liability of any kind (whether for breach of contract, negligence or otherwise) for any delay in delivery from any cause.
- 3 **Prices:** Any quotation submitted or any price set out in any price list is based upon the cost of labour and materials current at the date of the price list or quotation. The Company may at its discretion increase any price at any time to reflect changes in the cost of labour and materials and manufacturing overheads and will provide the Customer with a minimum of 30 days notice of the date such price increases are to become effective. Any orders placed by the Customer to the Company within this notice period will be honoured at the price applicable before the notification of the increased price.
- 4. **Terms of Payment:** Unless the Company in its discretion agrees to accept payment for products on other terms, the Customer shall pay for all products delivered by the Company within 30 days from the last day of the month in which the invoice is dated.
- 5. Literature and Suitability of Products: The Customer shall be responsible for determining the fitness of the Company's products for the purpose for which they are intended for use by the Customer, and acknowledges that the Company is not aware of that purpose unless the Customer communicates the intended use to the Company in writing and in that situation the Customer can rely on the Company's advice. It is specifically acknowledged that the Company provides installation information for some products and that the Customer can rely on that information and those guides.
- 6. Claims: All products sold will be deemed to be of required quality and type unless a claim specifying particulars of deficiencies or incorrect type is received by the Company within 30 days after receipt of products by the Customer.
- 7. **Returns and Cancellations:** Orders can only be cancelled or products returned with the prior written agreement of the Company. Returns due to client error will incur a restocking charge of 15% of the invoice price. Returns due to ANC DISTRIBUTION Australia Pty. Ltd. error will not incur a restocking charge. Products accepted for return due to a Customer error must be despatched at the Customer's cost,. Products accepted for return due to an ANC DISTRIBUTION Australia Pty. Ltd. error will be despatched at the Company's cost.
- 8. Delivery: Cost of delivery from our store to the Customer's nominated point will be at the Customer's cost, unless prior arrangement to the contrary.
- 9. Insurance: Products supplied will be insured by the Company up to the point of receipt at the Customer's nominated delivery address.
- 10. Title of Goods: Full legal and equitable title in each product supplied will remain vested in the Company until the Company has received payment in full of all amounts owing by the Customer to the Company on an account whatsoever. The Customer shall have the right to sell products in which title remains vested in the Company in the ordinary course of trade. Until title in the products passes to the Customer or the products passes to the Customer or the product solely as fiduciary bailee for the Company, and in that capacity, will store the products separately from the Customer's own goods and those of any other person, in a manner which renders the products purely identifiable as the property of the Company. The Purchaser hereby irrevocably gives the seller, its agents and servants, leave and licence without the necessity of giving any notice to enter on and into any premises occupied by the Purchaser to search for and remove any of the goods supplied to or in which the seller has ownership as aforesaid without in any way being liable to the Purchaser or any person or company claiming through the Purchaser, if:
 - (a) (if the Customer is a corporation) the Customer commences to be wound up, or is placed under official management, or a receiver is appointed in respect of, or any encumbrancer takes possession of, its undertaking or property or any part thereof, of the Customer is unable to pay its debts; or
 - (b) (if the Customer is a natural person) the Customer becomes insolvent or bankrupt, or commits an act of bankruptcy or makes an assignment for the benefit of a creditor or creditors; or
 - (c) the Customer fails to pay the whole of any part of the purchase price or transport or other charges for any products supplied by the Company when due and payable.
- 11. **Test Certificates**: Test Certificates will only be supplied if requested at the time of ordering. A test certificate issued by the Company in respect of a product will not constitute a warranty by the Company as to the quality, suitability or characteristics of the product or the fitness of that product for any purpose.
- 12. Dimensions: Lengths and weights are subject to usual commercial tolerances.
- 13. **Suspension**: If, at the Customer's request, the Company suspends work the subject of an order for more than 30 days, the Customer shall pay the Company for the work performed prior to the suspension, and for usual materials procured of the order, within 30 days of receipt of an invoice for such work and for materials from the Company.
- 14.1 Liability: The Company warrants that its products will be free of defects caused by the default or neglect of the Company. If any product supplied by the Company is defective, the Company's liability in respect of such product will be limited to, at the Company's sole discretion:-
 - (a) the replacement of the product or the supply of an equivalent product;
 - (b) the payment of the cost of replacing the product or obtaining an equivalent product;
 - (c) the repair of the product; or
 - (d) the payment of the cost of repair of the product.
 - Except as provided above, the Company will not be liable in any way whatsoever (whether in contract, negligence or otherwise) for the injury, loss, damage, claim, action or proceeding suffered or incurred by or made or brought against the Customer and directly or indirectly cause or contributed to by a defective product, the Company's negligence or any breach of contract.
- 14.2Except as provided in this clause no warranty is given in respect of any product and the Customer acknowledges that no warranty has been given by on or behalf of the Company. All statutory warranties negatived to the maximum extent permitted by law.
- 15. Law: The law of Victoria shall apply to all contracts for the supply of products by the Company to the Customer. To the extent that any applicable law of any State or of the Commonwealth of Australia which cannot be excluded affects the applicability or validity of any of the foregoing conditions, the conditions shall be read and construed as being subject to such law.
- 16. Warranty: All ANC DISTRIBUTION Australia Pty. Ltd. products are warranted to be free from defects in material or workmanship for the warranty period associated with each product. Please consult the warranty card applicable to your product or an ANC DISTRBUTION Australia Pty. Ltd. representative for details. During the warranty period ANC DISTRIBUTION Australia Pty. Ltd. will at its option repair or replace without charge any products or part thereof found to be defective in material or workmanship. This warranty does not extend to any product which has been subject to misuse, abuse, negligence, accident, alteration or unauthorised repair. Goods supplied by us but manufactured by others will be warranted only to the extent of the manufacturer's warranty. Defective products must be returned to ANC DISTRIBUTION Australia Pty. Ltd. 250 Governor Road, Braeside, Vic, 3195 within the above period, transportation prepaid, ANC DISTRIBUTION Australia Pty. Ltd. will bear the cost of return transportation.

THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES EXPRESS OR IMPLIED INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. IN NO EVENT WILL ANC DISTRIBUTION AUSTRALIA PTY. LTD. BE LIABLE FOR SPECIAL OR CONSEQUENTIAL DAMAGES OR LOSS OF VEHICLE, CARGO OR PROFITS.

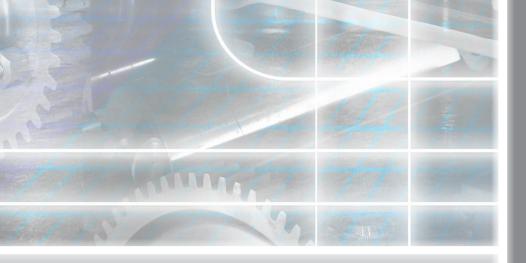



ANC DISTRIBUTION Australia Pty Ltd

Free Phone: 1800 426 272 www.ancdist.com.au facebook.com/ancdist/

LOCATIONS

VIC: P: 03 9587 6700

A: 250 Governor Rd, Braeside, VIC 3195

E: salesVIC@ancdist.com.au

NSW: P: 02 9604 8000

A: 13 Vicars Place,

Wetherill Park NSW 2164

E: salesNSW@ancdist.com.au

QLD: P: 07 3217 9175

A: Unit 1, 29-41 Lysaght St, Acadia Ridge QLD 4110

E: salesQLD@ancdist.com.au

WA: P: 08 9358 2773

A: 52B Murray Rd North, Welshpool WA 6106

E: salesWA@ancdist.com.au

ANC DISTRIBUTION New Zealand Limited

Free Phone: 0508 426 272 www.ancdist.co.nz www.facebook.com/ancdist.nz/

LOCATIONS

AUCKLAND:

A: 17 Andrew Baxter Drive, Airport Oaks, 2022

E: sales@ancdist.co.nz

CHRISTCHURCH:

A: 112 Antigua St, Sydenham, 8022

E: sales@ancdist.co.nz

TAURANGA:

A: 11 Newton St, Mt Maunganui, 3116 E: sales@ancdist.co.nz

